



Simultaneous Localization and Mapping by Cooperative Robots

BY: KEVIN HORN

ADVISED BY: DR. MEHRAN ANDALIBI


SLAM

- ▶ Is it possible to place a mobile robot in an unknown environment and for the robot to incrementally build a map of its environment while determining its position within that map?

Source: H. Durrant-Whyte and T. Bailey, *Simultaneous Localization and Mapping: Part 1*, 2006.

Advantages of Cooperation

- ▶ Potential for diverse vehicle cooperation
 - ▶ Land, air, and sea
- ▶ Faster more fault tolerant mapping
- ▶ Having overlapping information, which can compensate for sensor uncertainties

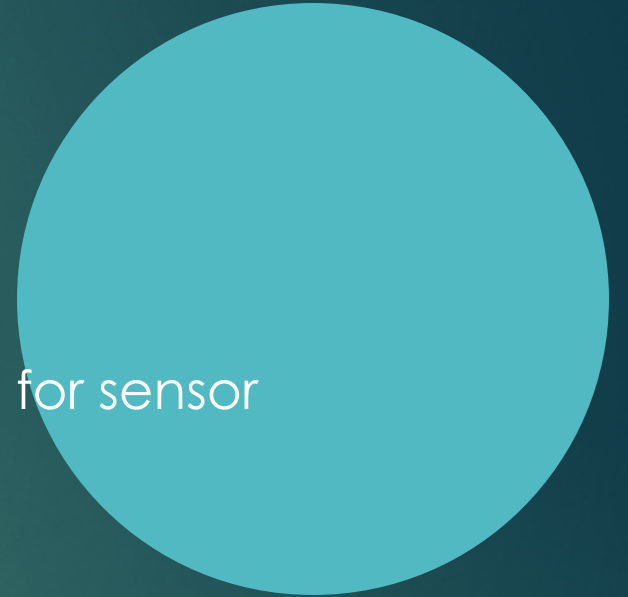

Multiple Robot Control

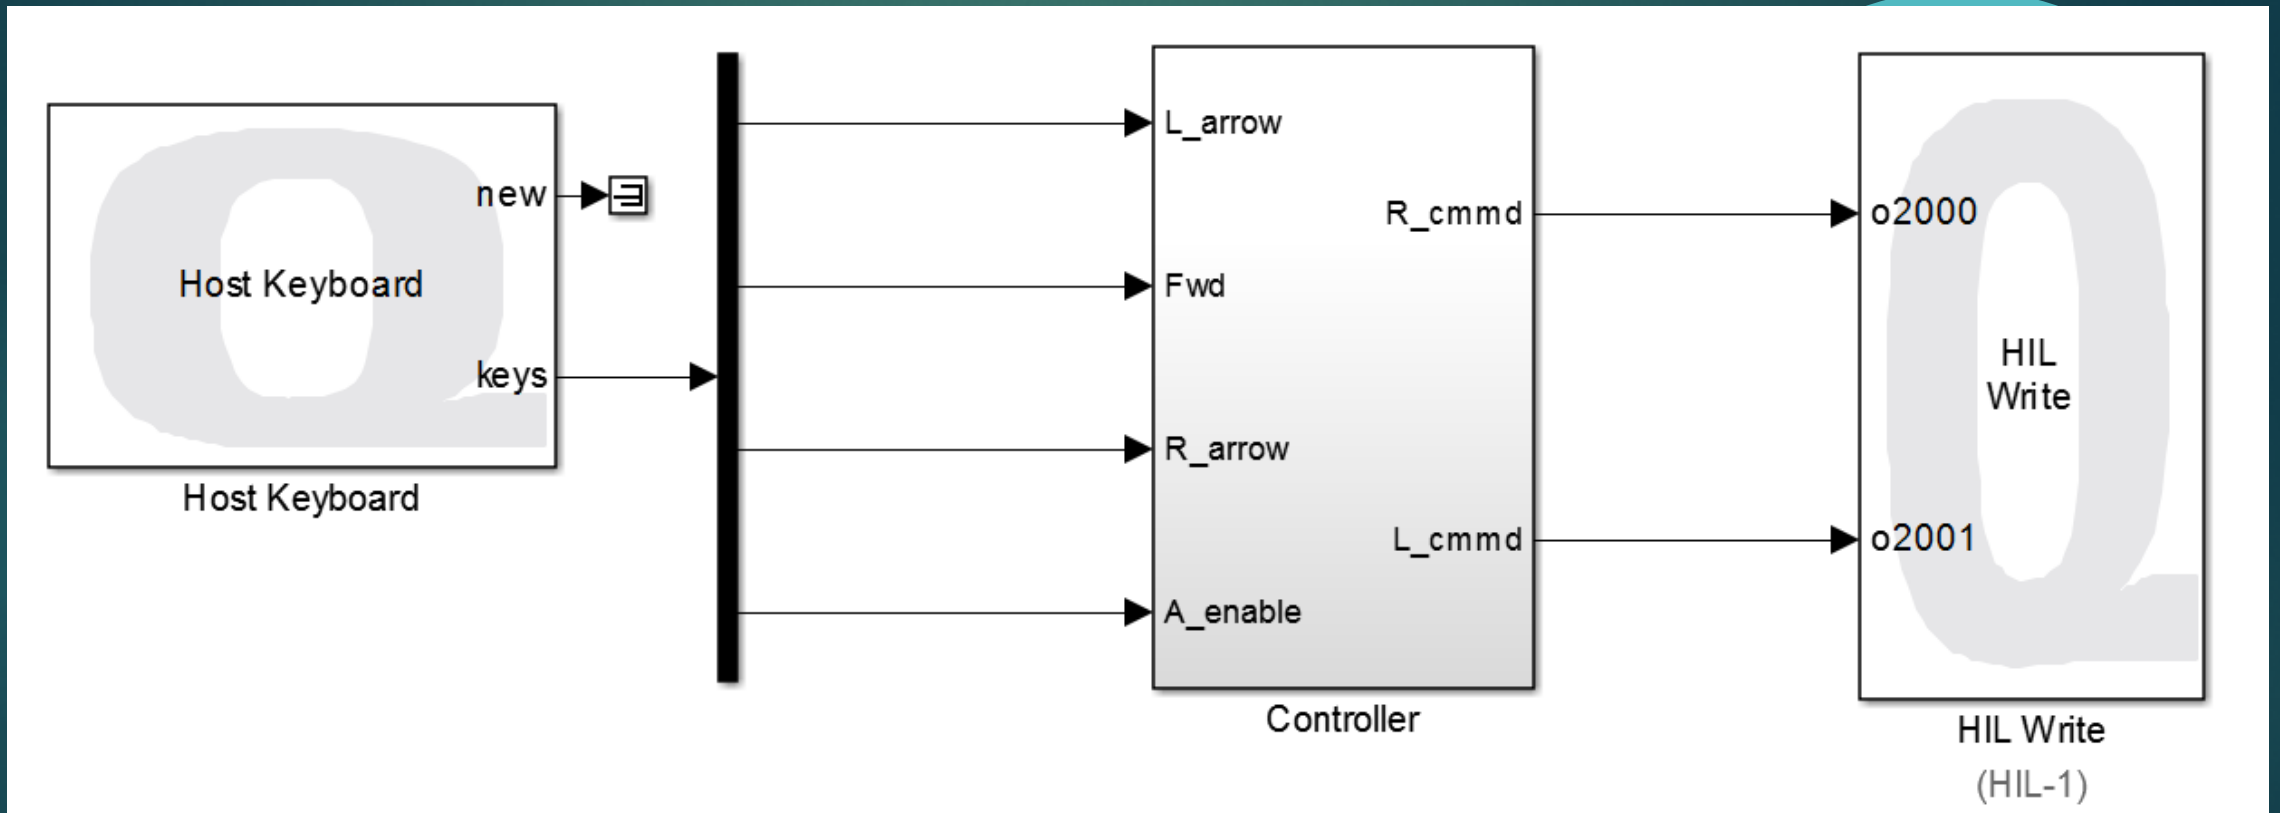


Figure 1: Keyboard Control

Multiple Robot Communication

- ▶ Wheel encoders
 - ▶ Determine planar coordinates and heading direction
- ▶ Kinect sensor

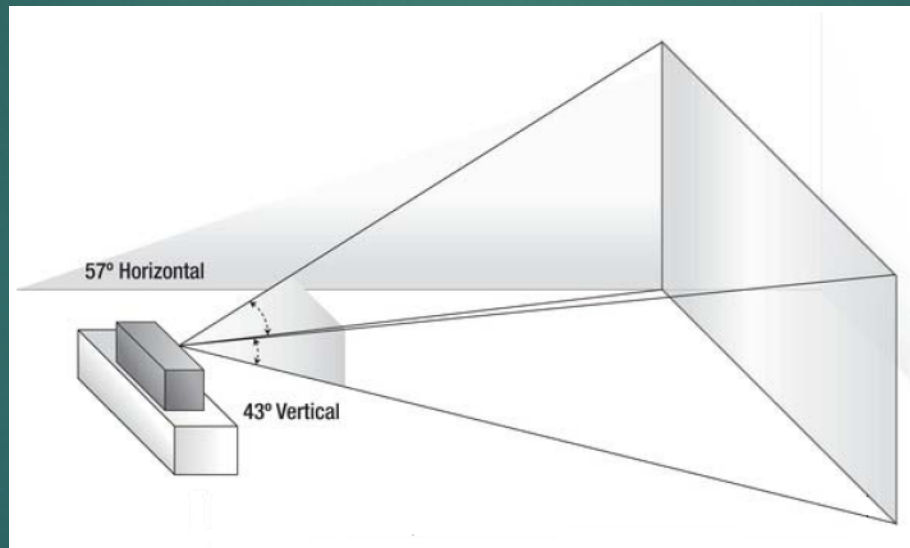


Figure 2: Kinect Field of View

Source: <http://talkingaboutme.tistory.com/609>



Map Building

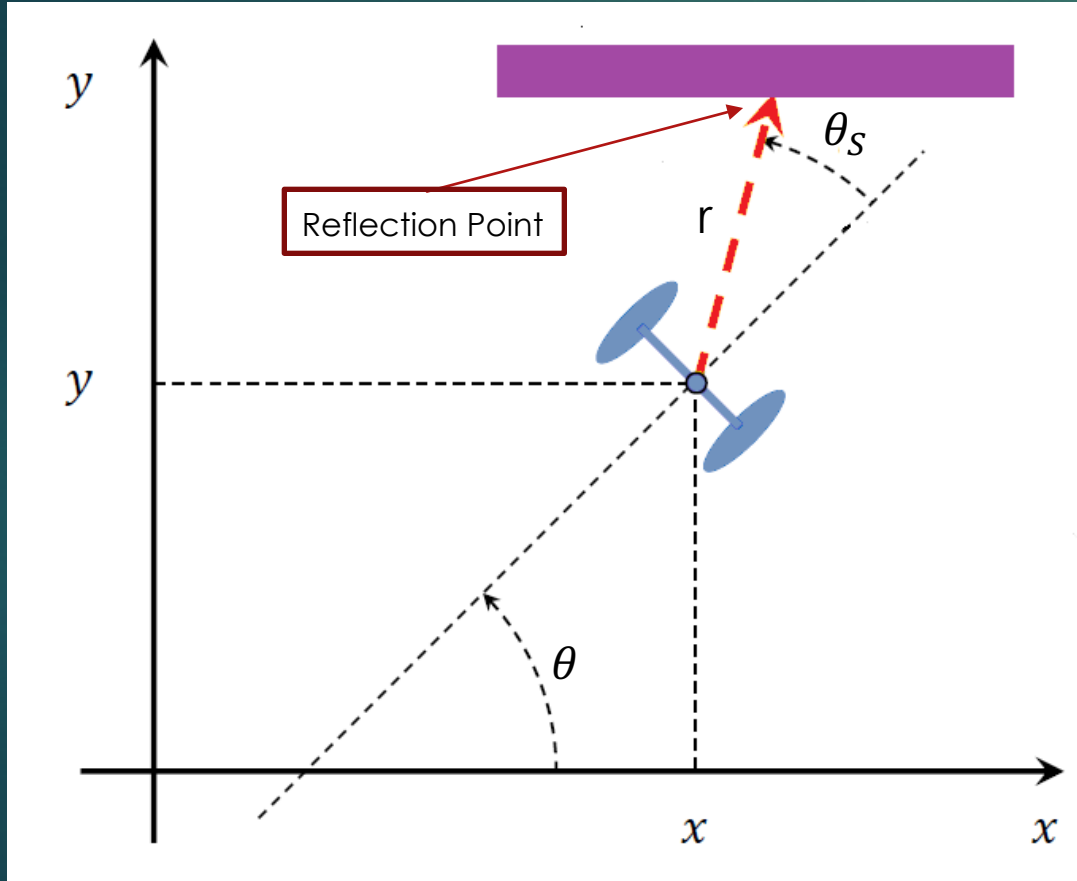


Figure 3: Coordinate Transformation

The location of the reflection point is:

$$x_{rp} = x + r * \cos(\theta + \theta_s)$$

$$y_{rp} = y + r * \sin(\theta + \theta_s)$$

Map Building



Figure 4: Mapped Environment

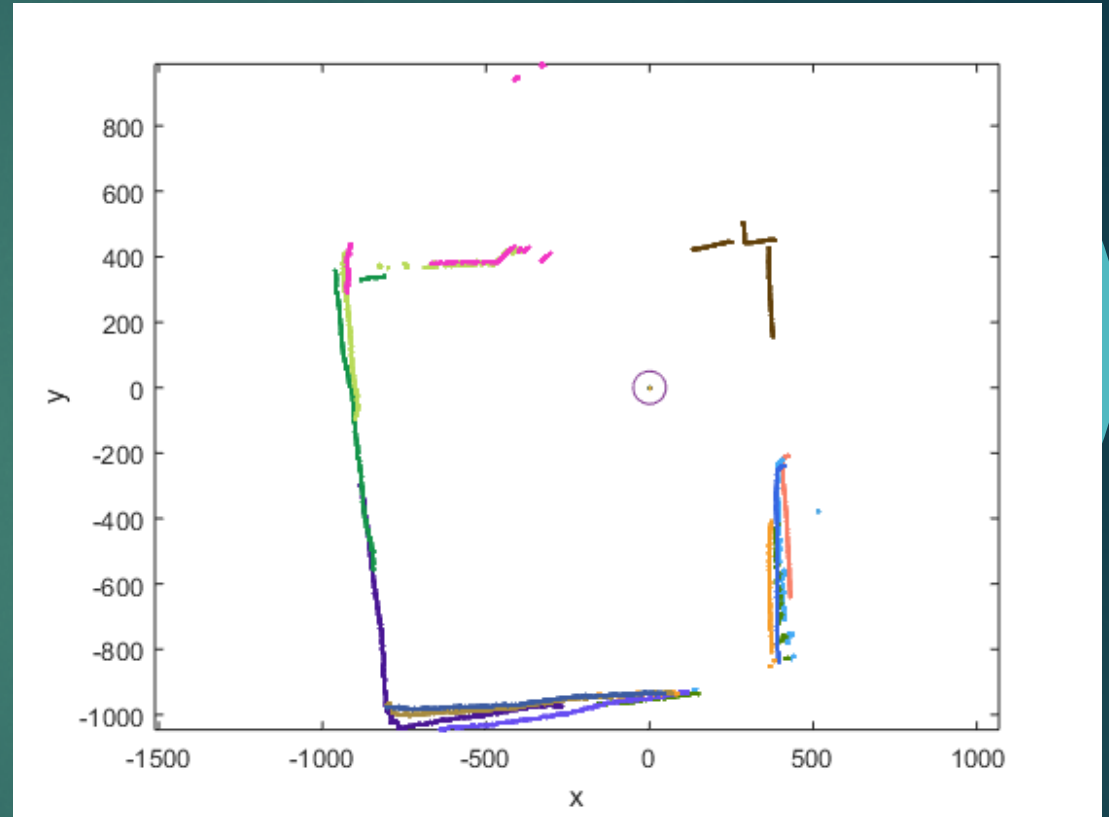


Figure 5: 2D Map

Map Building

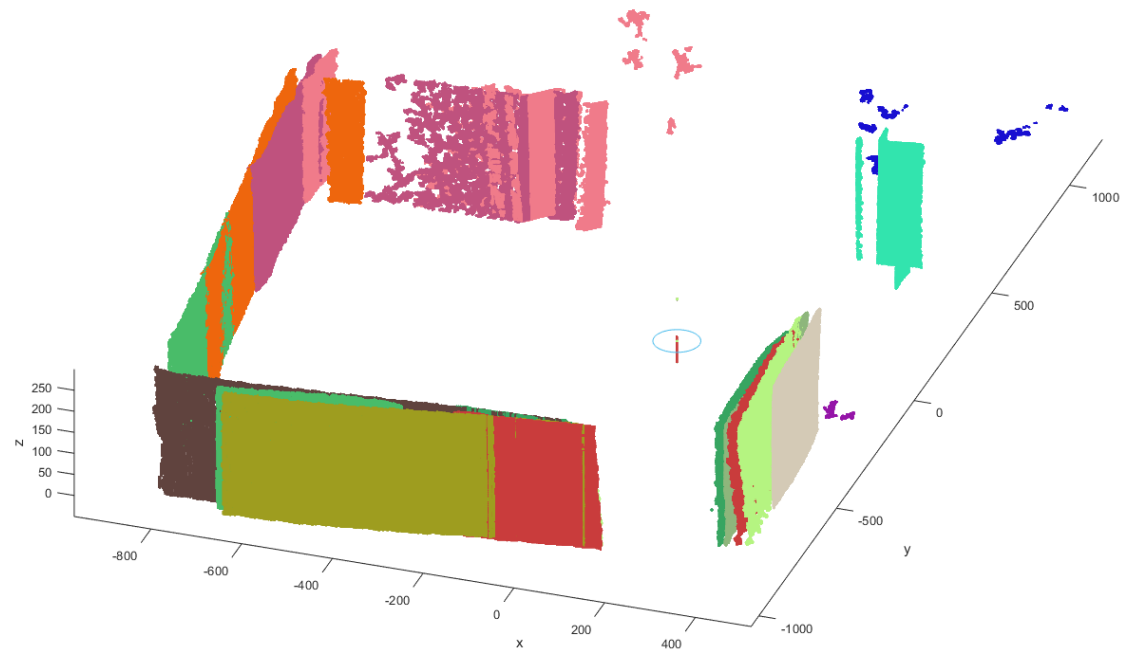


Figure 6: 3D Map

Moving Object Detection

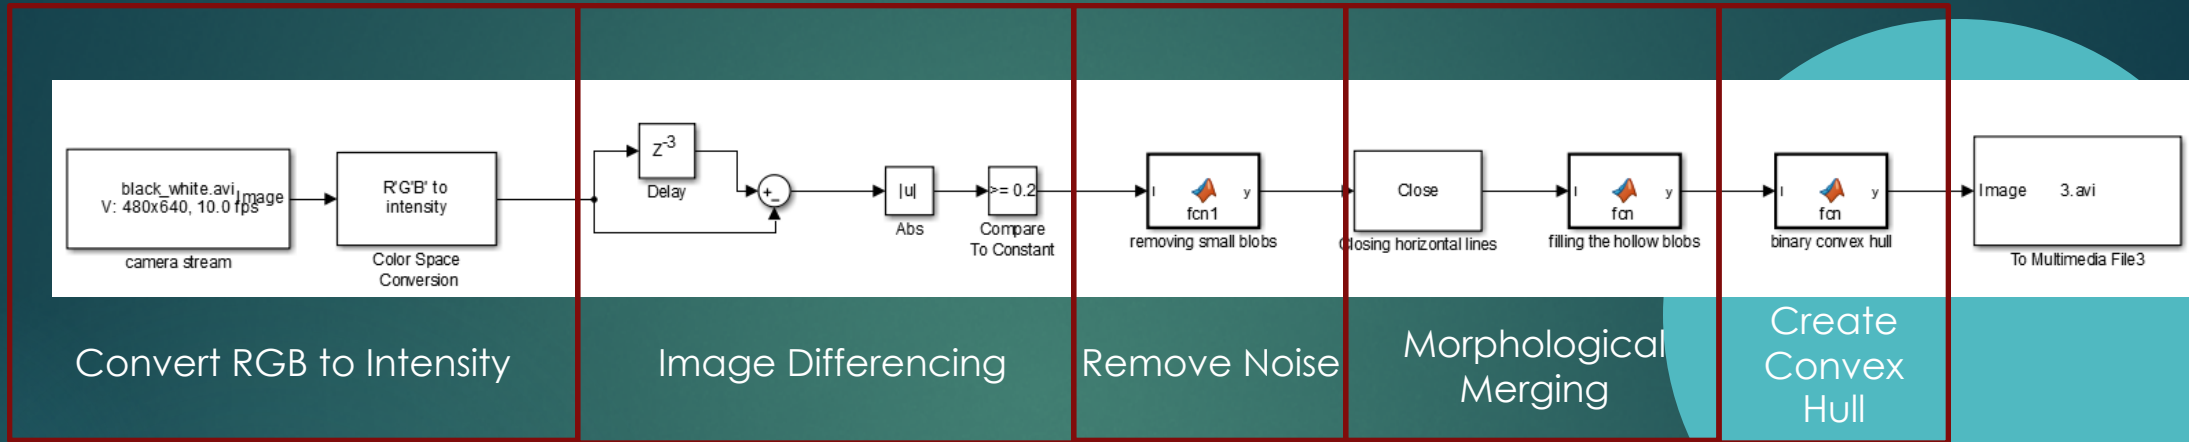


Figure 7: Moving Object Detection Flowchart



Figure 8.a: Original Video

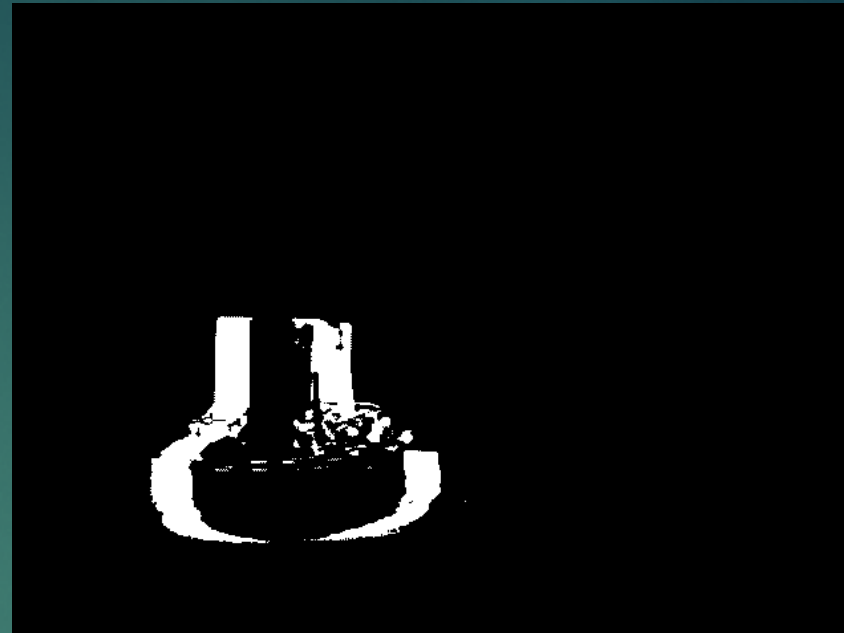


Figure 8.b: Frame Subtraction

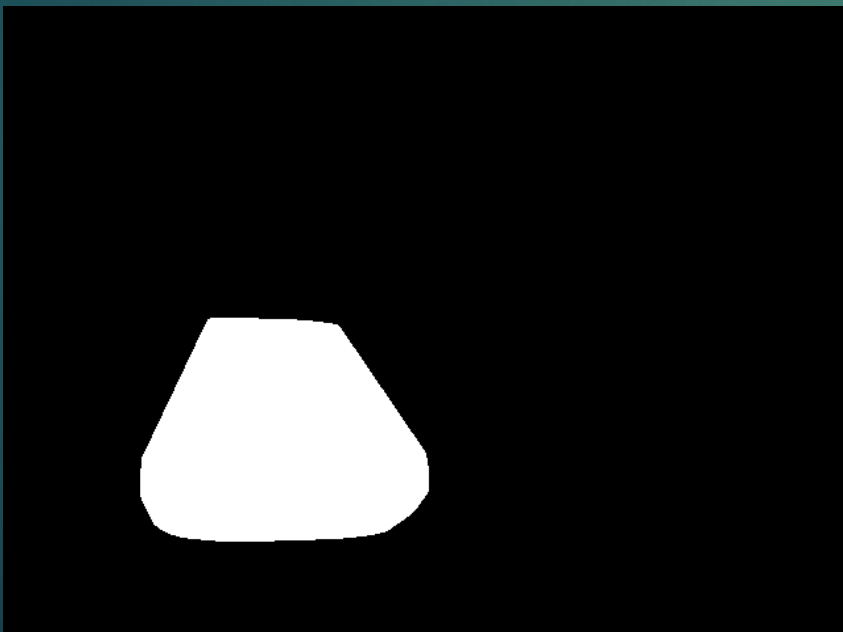


Figure 8.c: Convex Hull

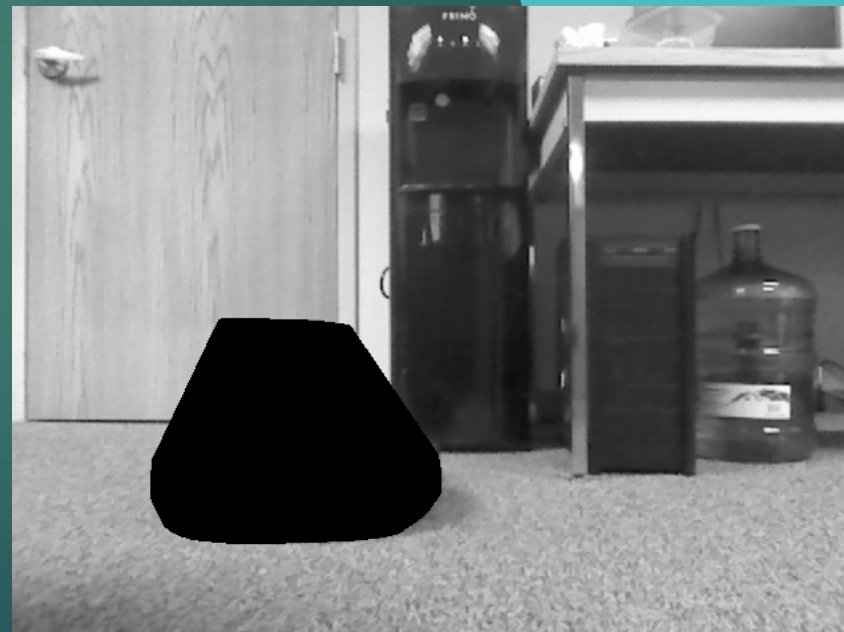


Figure 8.d: Moving Object Removed

Robot Identification

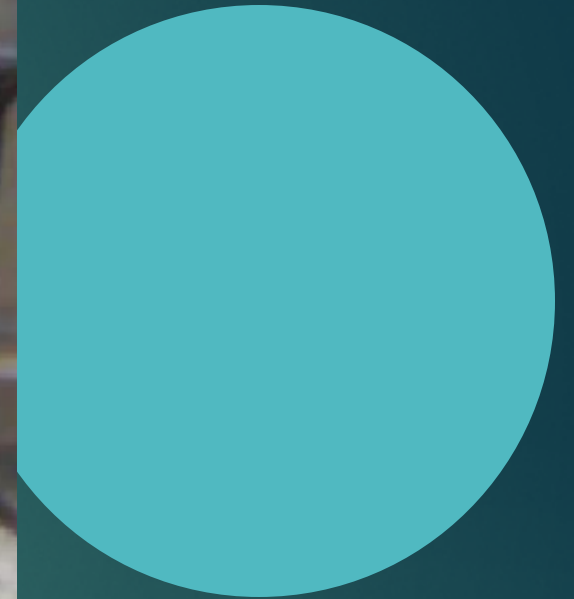


Figure 9: Robot identification

Future Steps

- ▶ Improving object detection and identification
- ▶ Combining individual maps
- ▶ Gaining familiarity with sensor fusion
- ▶ Implementing cooperative SLAM



Conclusion

- ▶ Control and communication with multiple robots
- ▶ Map making with individual robots
- ▶ Moving object identification and removal from the maps

