

Aug 15th, 9:30 AM - 10:45 AM

## An Alternative Method of Identification of a Failed Engine in Twin-Engine Propeller Aircraft

Andrey Babin

*Piedmont Airlines, Inc.*, andrey.k.babin@gmail.com

Andrew R. Dattel Ph.D.

*Assistant Professor of Graduate Studies, Embry-Riddle Aeronautical University*, dattela@erau.edu

Follow this and additional works at: <https://commons.erau.edu/ntas>




Part of the [Aviation and Space Education Commons](#), and the [Aviation Safety and Security Commons](#)

---

Babin, Andrey and Dattel, Andrew R. Ph.D., "An Alternative Method of Identification of a Failed Engine in Twin-Engine Propeller Aircraft" (2018). *National Training Aircraft Symposium (NTAS)*. 34.  
<https://commons.erau.edu/ntas/2018/presentations/34>

This Presentation is brought to you for free and open access by the Conferences at Scholarly Commons. It has been accepted for inclusion in National Training Aircraft Symposium (NTAS) by an authorized administrator of Scholarly Commons. For more information, please contact [commons@erau.edu](mailto:commons@erau.edu).

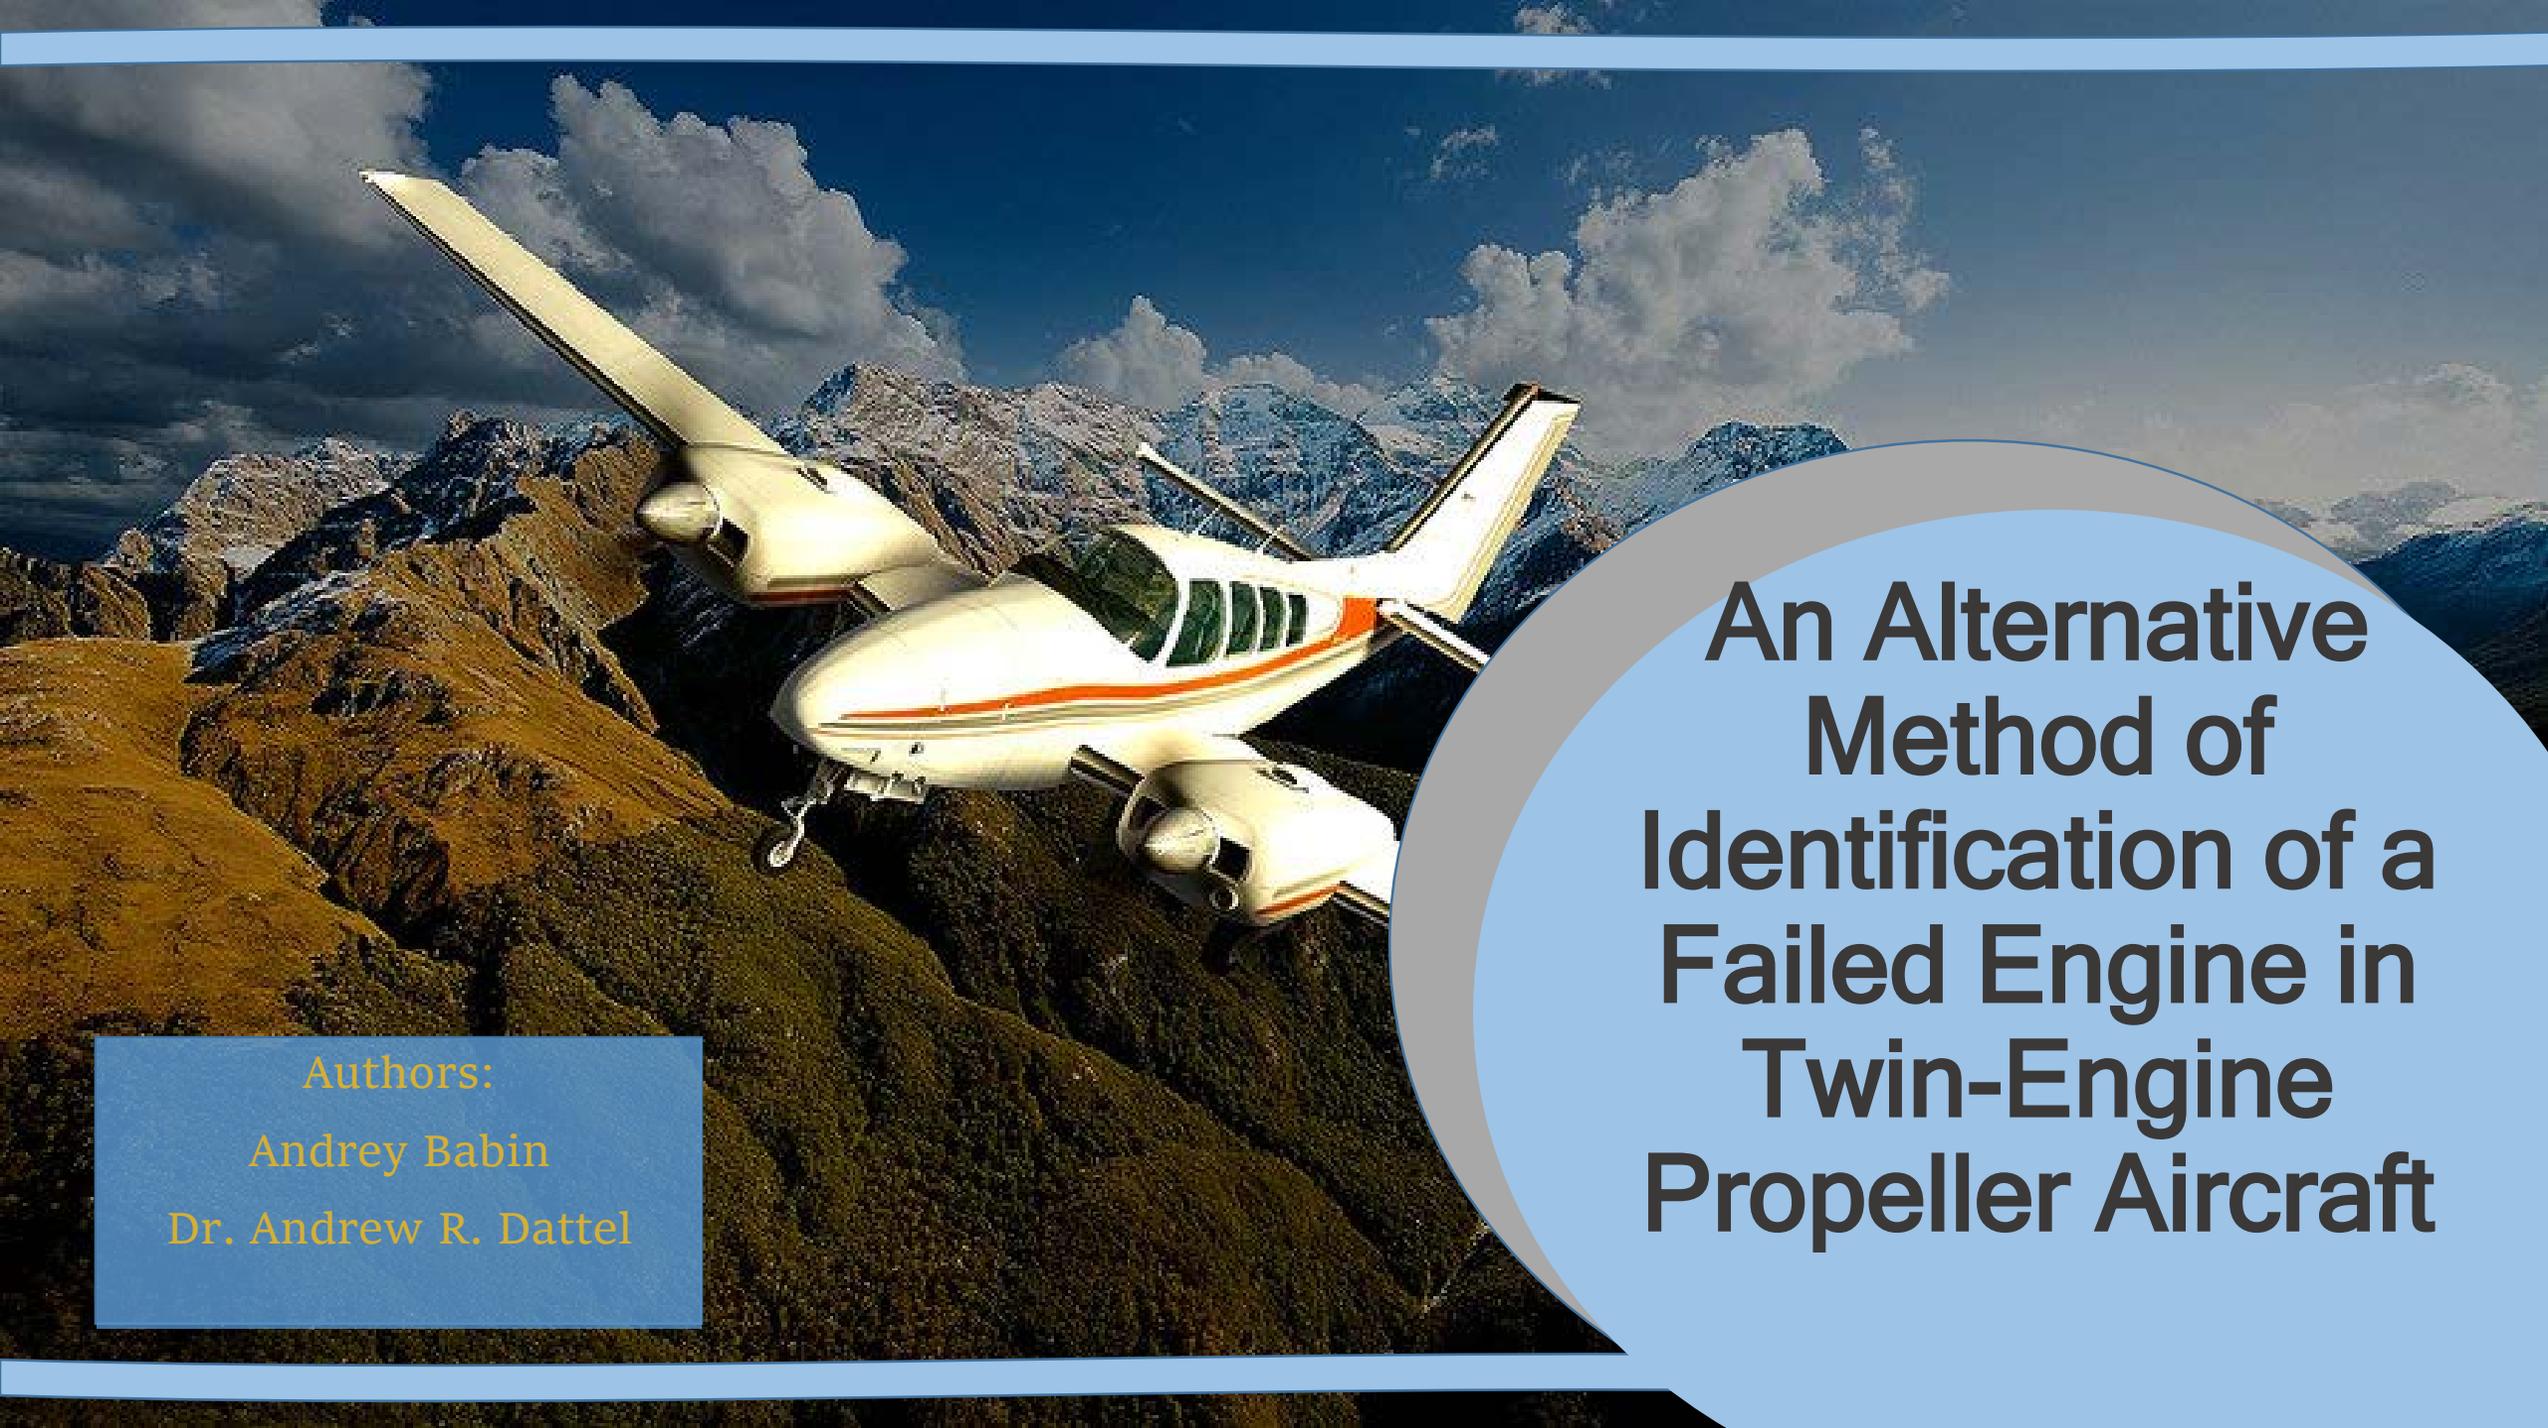

# An Alternative Method of Identification of a Failed Engine in Twin-Engine Propeller Aircraft

Authors:

Andrey Babin

Dr. Andrew R. Dattel

1

# Introduction



# TransAsia Flight 235

- ATR 72-600 aircraft
- Uncommanded feather of the right engine
- Captain reduced throttle of the left engine and shut it down
- No power at 1,500 feet AGL, engine restart attempts unsuccessful
- Uncontrolled stall and crash
- 43 fatalities




# Engine misidentification

- Turboprops: From 1985 to 1997, almost 50% of in-flight engine shutdowns involved a shutdown of the working engine (Sallee & Gibbons, 1999)
- Turbofans: From 1958 to 1997, 29% of in-flight engine shutdowns involved a shutdown of the working engine (Sallee & Gibbons, 1999)
- Twin-engine helicopters: 40% of interviewed pilots admitted moving the throttle of a working engine in emergency in real life/simulator (Wildzunas et al., 1999; as cited in Aviation Safety Council, 2016)

# Dangers of twin-engine propeller aircraft operations

- Failed engine creates drag due to the windmilling propeller
- Asymmetric thrust follows, resulting in a significant yaw
- Climb performance loss of up to 80% (Federal Aviation Administration, 2016)

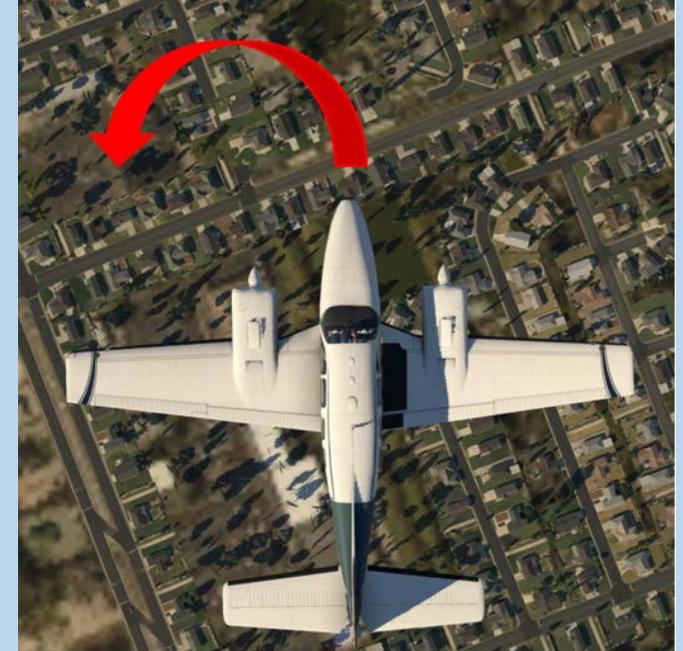

# Identify-Verify-Feather

- Identify: “Dead leg – dead engine”
  - Compensate for the yaw by applying rudder
  - Dead leg (not pushing the rudder pedal) is on the side of dead (failed) engine
- Verify: Confirm correct identification
  - Pull back the throttle of the identified engine
  - Expect no change in the direction of flight and engine sound
- Feather the propeller of the failed engine

Source: (Gardner, Schiff, & Bringloe, 2011)

# Purpose of the study

- Current method is believed to be too resource-demanding
  - An alternative method was proposed and tested
- The alternative method was based on the visual sensory channel
- Participants flew three flights with simulated engine failures
- Response times and accuracy of identification were measured and compared between two groups (Traditional vs Alternative)

# Hypotheses

- H01: There is no difference in accuracy of engine identification between participants using the traditional and the alternative method.
- H02: There is no difference in response time across the three flights between participants using the traditional and the alternative method
- H03: There is no difference in average response time for all three flights between participants using the traditional and the alternative method



2

Lit. Review

# Human Capabilities and Limitations

- Stress
  - Stress can affect operator's judgment and assessment of the situation
  - Evidence that conflicts with expectations may be explained away or ignored (Kontogiannis & Malakis, 2009)
- Workload
  - Increase in workload can impair performance (Casto & Casali, 2013) and lead to problems with task prioritization (Morris & Leung, 2007)
  - Pilot error can become the source of increased workload (Morris & Leung, 2007)
  - Planning for the increase in workload helps avoid detriments to performance (Andre & Heers, 1995)

# Human Capabilities and Limitations

- Attention
  - Human brain can handle up to four tasks concurrently without decrease in performance (Fisher, 1984; Julesz, 1981; James, 1980; as cited in Strayer & Drews, 2007)
  - Attention can be influenced by anxiety, making pilot's gaze behavior more chaotic (Allsop & Gray, 2014)

# Haptic vs Visual Sensory Channels

- 80% of information we perceive is visual (Geruschat & Smith, 2010)
- People are more likely to notice visual cues (Hecht & Reiner, 2008) over haptic or auditory
- Information coming through the visual channel gets priority even if an operator knows that it is less reliable than the haptic channel (Xu, O'Keefe, Suzuki, & Franconeri, 2012)


3

Method



# Materials and Apparatus

- X-Plane 11 flight simulation software
- Engine Status Panel
  - Indicates which engine has failed based on the fuel flow value
- Training video
  - Explained basic concepts and the method of identification of a failed engine
- Pre- and post-flight questionnaires
  - Demographics
  - Confidence in correct engine identification
- Three simulated takeoffs
  - Flight 1: Left engine failure 30 sec after rotation
  - Flight 2: Right engine failure 20 sec after rotation
  - Flight 3: Right engine failure 45 sec after rotation

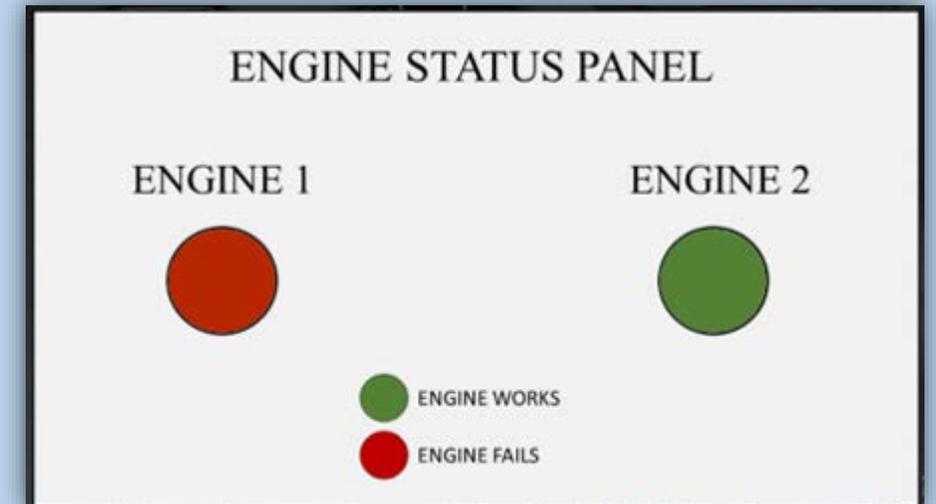

# Procedure

- 50 student pilots who did not have multi-engine rating (MEL) and had not started their training were sampled
  - Students received \$20 for participation
- Participants were assigned to two groups
  - Traditional Group
  - Alternative Group
- Participants watched a training video
- Participants flew a practice flight
  - Engine failure was demonstrated
  - Participants were given an opportunity to practice the procedure
- Participants performed three takeoffs
  - Engine failure was simulated by failing fuel pumps on the corresponding engine
  - Participants were asked to announce verbally which engine had failed and comment aloud their actions after the failure

4

Results



# Results: Demographics

- 42 Males & 8 Females
- Mean age  $M = 20.22$  years ( $SD = 2.67$  years)
- Mode age 18 years
- Average flight experience  $M = 145.90$  hours ( $SD = 75.45$  hours)

# Result: Hypotheses testing

- H01: Difference in accuracy of identification between group
  - All participants feathered the correct engine
  - H01 retained
- H02: Difference in response time across flights and between groups
  - 2x3 mixed ANOVA within-subject variable test was not significant
  - H02 retained

Group	Flight	Mean	Std. Error	95% Confidence Interval	
				Lower Bound	Upper Bound
Traditional	1	5.231	.649	3.927	6.535
	2	4.830	.441	3.943	5.718
	3	5.224	.576	4.067	6.381
Alternative	1	3.984	.649	2.680	5.288
	2	2.693	.441	1.806	3.580
	3	2.586	.576	1.429	3.744

# Result: Hypotheses testing

- H03: Difference in response time between groups
  - 2x3 mixed ANOVA between-subjects variable was significant at  $F(1,48) = 10.83, p = 0.002$
  - Alternative Group ( $M = 3.09$  seconds,  $SD = 1.84$  seconds) was faster at identification than Traditional Group ( $M = 5.09$  seconds,  $SD = 2.43$  seconds)
  - H03 rejected


# Result: Qualitative data

Participants' assessment of identification of a failed engine

Do you feel that you identified a failed engine correctly for each of the three flights?	Flight 1		Flight 2		Flight 3	
	Yes	No	Yes	No	Yes	No
Traditional Group	25	0	25	0	23	2
Alternative Group	25	0	25	0	25	0

Do you feel that you identified a failed engine in adequate amount of time during each of the three flights?	Flight 1		Flight 2		Flight 3	
	Yes	No	Yes	No	Yes	No
Traditional Group	23	2	24	1	24	1
Alternative Group	24	1	24	1	25	0

# Results: Suggestions for improvement

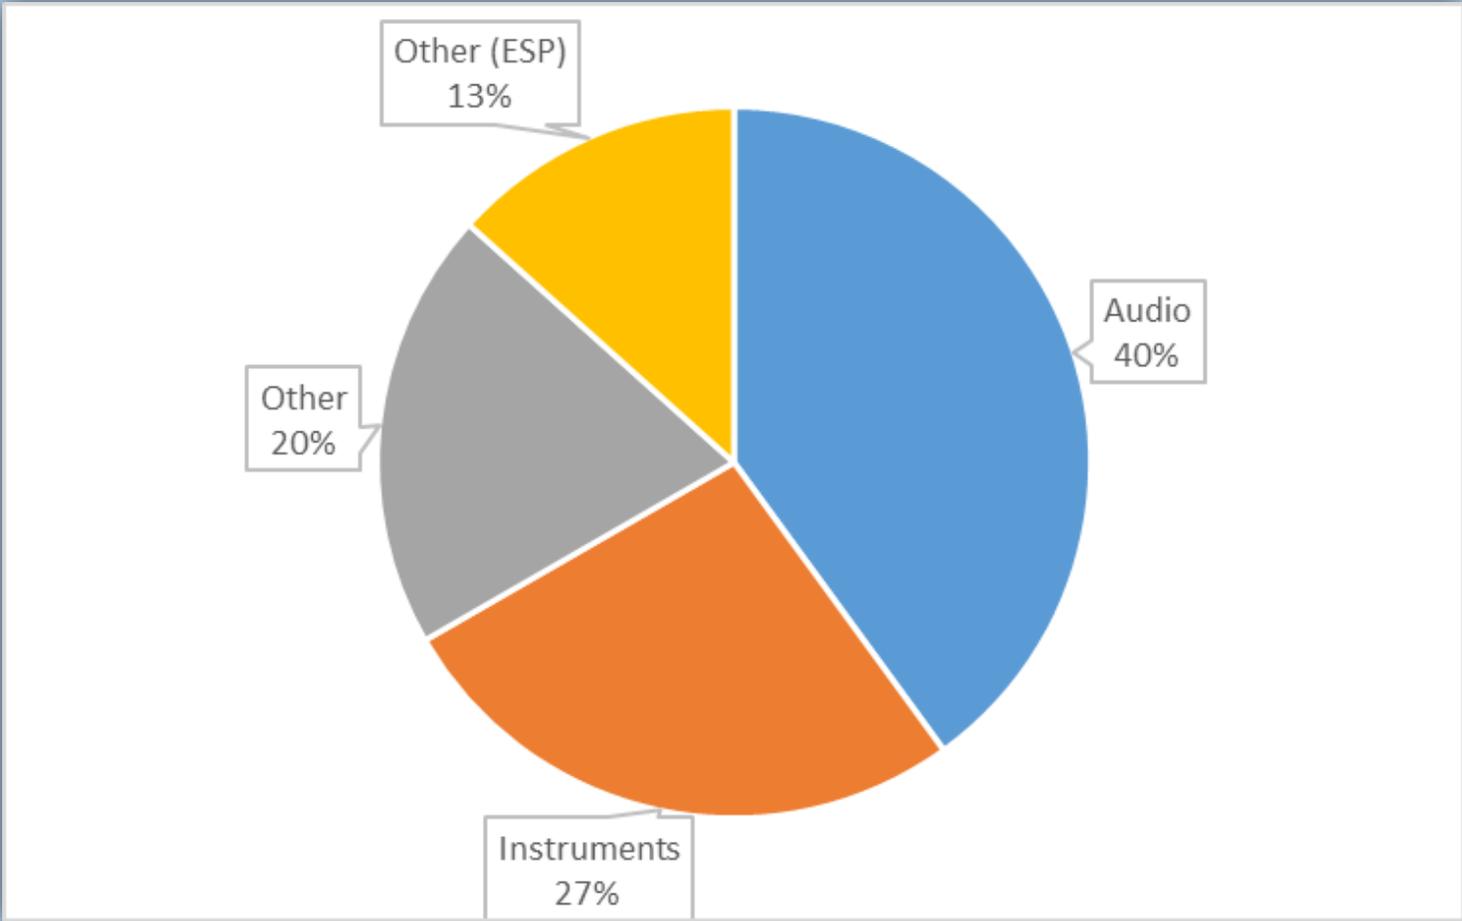

5

Discussion



# Discussion

- Alternative Group was significantly faster at identifying a failed engine than Traditional Group
- Some Traditional Group participants reported using visual cues for identification
- Alternative Group participants were generally more confident in correct identification
- Alternative Group participants reported being generally less confused in regard to which engine was failing
  - Traditional Group:  $M = 2.28$ ,  $SD = 1.27$ . Alternative Group:  $M = 1.84$ ,  $SD = 1.03$ .

# Limitations

- The response time was reducing from Flight 1 to Flight 3 for Alternative Group
  - With more power, there could be a significant difference
- 8 participants (6 in Traditional Group and 2 in Alternative Group) moved the wrong throttle initially, but feathered the correct engine propeller
  - Increased response time
  - Might have hastily moved the throttle
  - Possible confusion due to no experience in multi-engine aircraft
  - Observing participant actions could help avoiding the issue in future research
- Participant behavior was not consistent
  - Did not retract landing gear
  - Did not power up

# Further research

- Perform similar experiment with multi-engine-rated pilots
  - Determine how past experience affects the ability to use the new method for identification
  - Possibly make further changes to the method
- Identify engine parameters most indicative of the failure
  - Fuel flow was used, but is not enough
  - Several parameters might need to be used
  - Examples: Fuel Flow + Exhaust Gas Temperature

# Suggestions

- Particular benefit to General Aviation
  - Reason: Lack of sophisticated systems in GA aircraft
  - Reduce risk of human error in emergency situations
  - Engine Status Panel can be installed aside from other instruments (to avoid clutter)
  - Newly-built aircraft are equipped with glass cockpits, hence the panel can be shown on a display

6

Conclusion



# Conclusion

- Currently recommended method of identification might be too confusing and resource-demanding
  - This is dangerous in case if an engine fails on takeoff (high-workload)
- Using a method based on the visual sensory channel requires less time for identification of a failed engine
- A panel with a visual indicator is recommended to be installed in GA aircraft to reduce the risk of engine misidentification

# References

- Aviation Safety Council (2016). *Aviation occurrence report: 4 February, 2015, TransAsia Airways Flight GE235 ATR72-212A, loss of control and crashed into Keelung river three nautical miles east of Songshan airport* (Report No.: ASC-AOR-16-06-001). Retrieved from Aviation Safety Council website: [https://www.asc.gov.tw/upload/acd\\_att/ASC-AOR-16-06-001%20EN.pdf](https://www.asc.gov.tw/upload/acd_att/ASC-AOR-16-06-001%20EN.pdf)
- Salas, E., Prince, C., Baker, D. P., & Shrestha, L., (1995). Situation awareness in team performance: Implications for measurement and training. *Human Factors*, *37*, 123-136.
- Allsop, J., & Gray, R. (2014). Flying under pressure: Effects of anxiety on attention and gaze behavior in aviation. *Journal of Applied Research in Memory and Cognition*, *3*, 63-71.
- Andre, A. D., & Heers, S. T. (1995). Effects of workload preview on task scheduling during simulated instrument flight. *The International Journal of Aviation Psychology*, *5*, 5-23. doi:10.1207/s15327108ijap0501\_2
- Casto, K. L., & Casali, J. G. (2013). Effects of headset, flight workload, hearing ability, and communications message quality on pilot performance. *Human Factors*, *55*, 486-498. doi:10.1177/0018720812461013
- Federal Aviation Administration (2016). *Airplane Flying Handbook*. Oklahoma City, OK: Author.
- Fisher, D. L. (1984). Central capacity limits in consistent mapping, visual search tasks: Four channels or more?. *Cognitive Psychology*, *16*, 449-484.
- Gardner, B., Schiff, B. J., & Bringloe, R. (2011). *The Complete Multi-Engine Pilot*. Newcastle, WA: Aviation Supplies & Academics
- Geruschat, D. R., & Smith, A. J. (2010). Low vision for orientation and mobility. In Wiener, W. R., Welsch, R. L., Blasch, B. B. (Eds), *Foundations of orientation and mobility (3rd ed., Vol. 1)*, pp. 63-83. New York, NY: AFB Press
- Hecht, D., & Reiner, M. (2008). Sensory dominance in combinations of audio, visual and haptic stimuli. *Experimental Brain Research*, *193*, 307-314. doi: 10.1007/s00221-008-1626-z
- Julesz, B. (1981). Figure and ground perception in briefly presented isodipole textures. In M. Kubovy & J. R. Pomerantz (Eds.), *Perceptual Organization*. Hillsdale, N.J.: Erlbaum.
- Kontogiannis, T., & Malakis, S. (2009). A proactive approach to human error detection and identification in aviation and air traffic control. *Safety Science*, *47*, 693-706.
- Morris, C. H., & Leung, Y. K. (2007). Pilot mental workload: How well do pilots really perform? *Ergonomics*, *49*, 1581-1596. doi:10.1080/00140130600857987
- Strayer, D. L., & Drews, F. A. (2007). Attention. In Durso, F. T., Nickelsom, R. S., Dumais, S. T., Lewandowsky, S., & Perfect, T. J. *Handbook of applied cognition: Second edition (29-54)*. West Sussex, England: John Wiley & Sons, Ltd.
- Xu, Y., O'Keefe, S., Suzuki, S., & Franconeri, S. L. (2012). Visual influence on haptic torque perception. *Perception*, *41*(7), 862-870. doi: 10.1068/p7090

THANK YOU